


TSEK02: Radio Electronics


Lecture 2: Modulation (I)

Ted Johansson, EKS, ISY

Lab Signup (only required for lab 2)

- Lab 1 (Simulink) will take place 2019-11-26 17-21 in Olympen . All students, no signup required.
- Lab 2: In Lisam, go to Signup on first course page. 4 students each time.

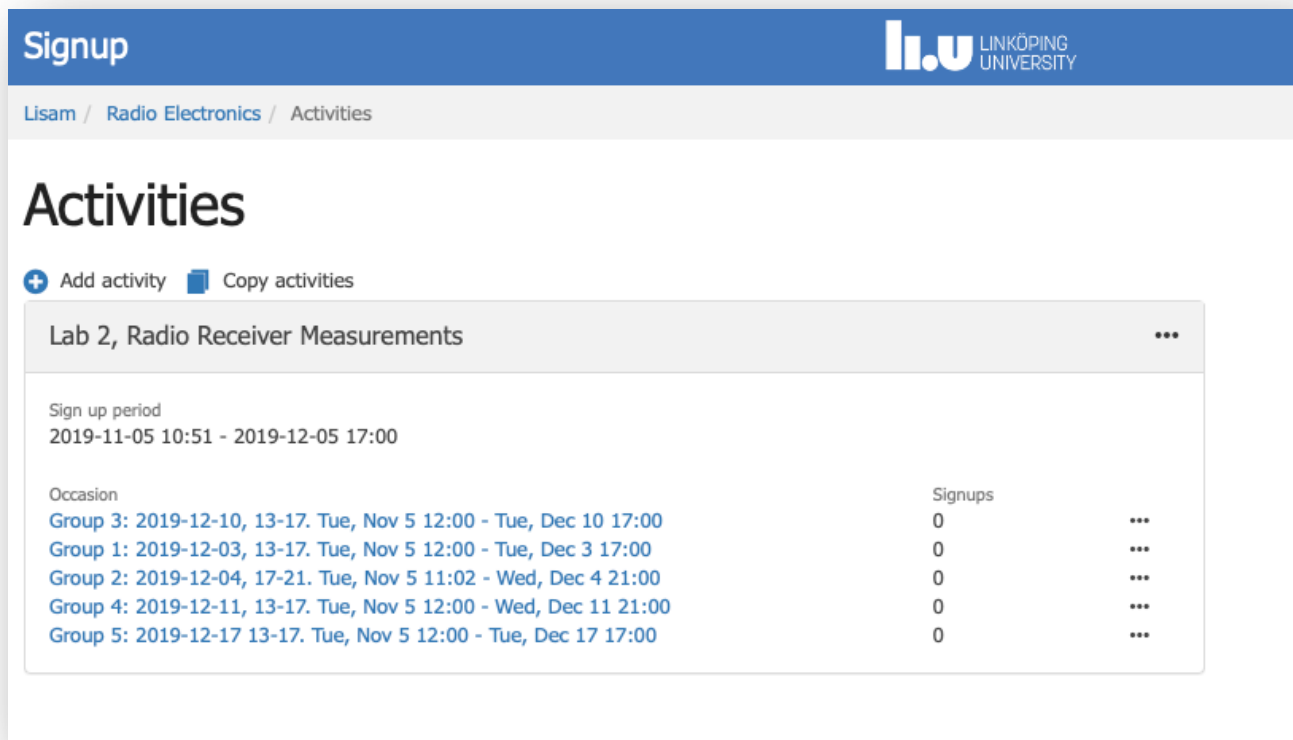

Signup 

[Lisam](#) / [Radio Electronics](#) / [Activities](#)

Activities

[+ Add activity](#) [Copy activities](#)

Lab 2, Radio Receiver Measurements [...](#)

Sign up period
2019-11-05 10:51 - 2019-12-05 17:00

| Occasion | Signups | |
|--|---------|-----|
| Group 3: 2019-12-10, 13-17. Tue, Nov 5 12:00 - Tue, Dec 10 17:00 | 0 | ... |
| Group 1: 2019-12-03, 13-17. Tue, Nov 5 12:00 - Tue, Dec 3 17:00 | 0 | ... |
| Group 2: 2019-12-04, 17-21. Tue, Nov 5 11:02 - Wed, Dec 4 21:00 | 0 | ... |
| Group 4: 2019-12-11, 13-17. Tue, Nov 5 12:00 - Wed, Dec 11 21:00 | 0 | ... |
| Group 5: 2019-12-17 13-17. Tue, Nov 5 12:00 - Tue, Dec 17 17:00 | 0 | ... |

An Overview of Modulation Techniques:

chapter 3.1 – 3.3.1


- Introduction
- Analog Modulation
 - Amplitude Modulation
 - Phase and Frequency Modulation
- Digital Modulation
- Bandwidth considerations

An Overview of Modulation Techniques: chapter 3.1 – 3.3.1

- **Introduction (3.1)**
- Analog Modulation
 - Amplitude Modulation
 - Phase and Frequency Modulation
- Digital Modulation
- Bandwidth considerations

Need for Modulation


- Every channel has a cut-off frequency ($f_{\text{cut-off}}$)
 - Theoretically, signals with $f > f_{\text{cut-off}}$ cannot propagate through the channel. There may also be a lower frequency limit.

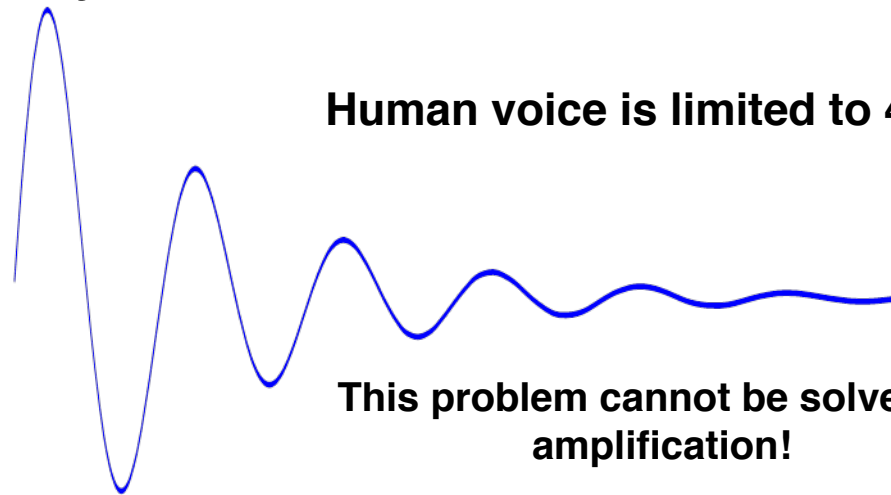

Human voice is limited to $4 \text{ kHz} < f_{\text{cut-off}}$


This problem cannot be solved by amplification!

The electromagnetic spectrum

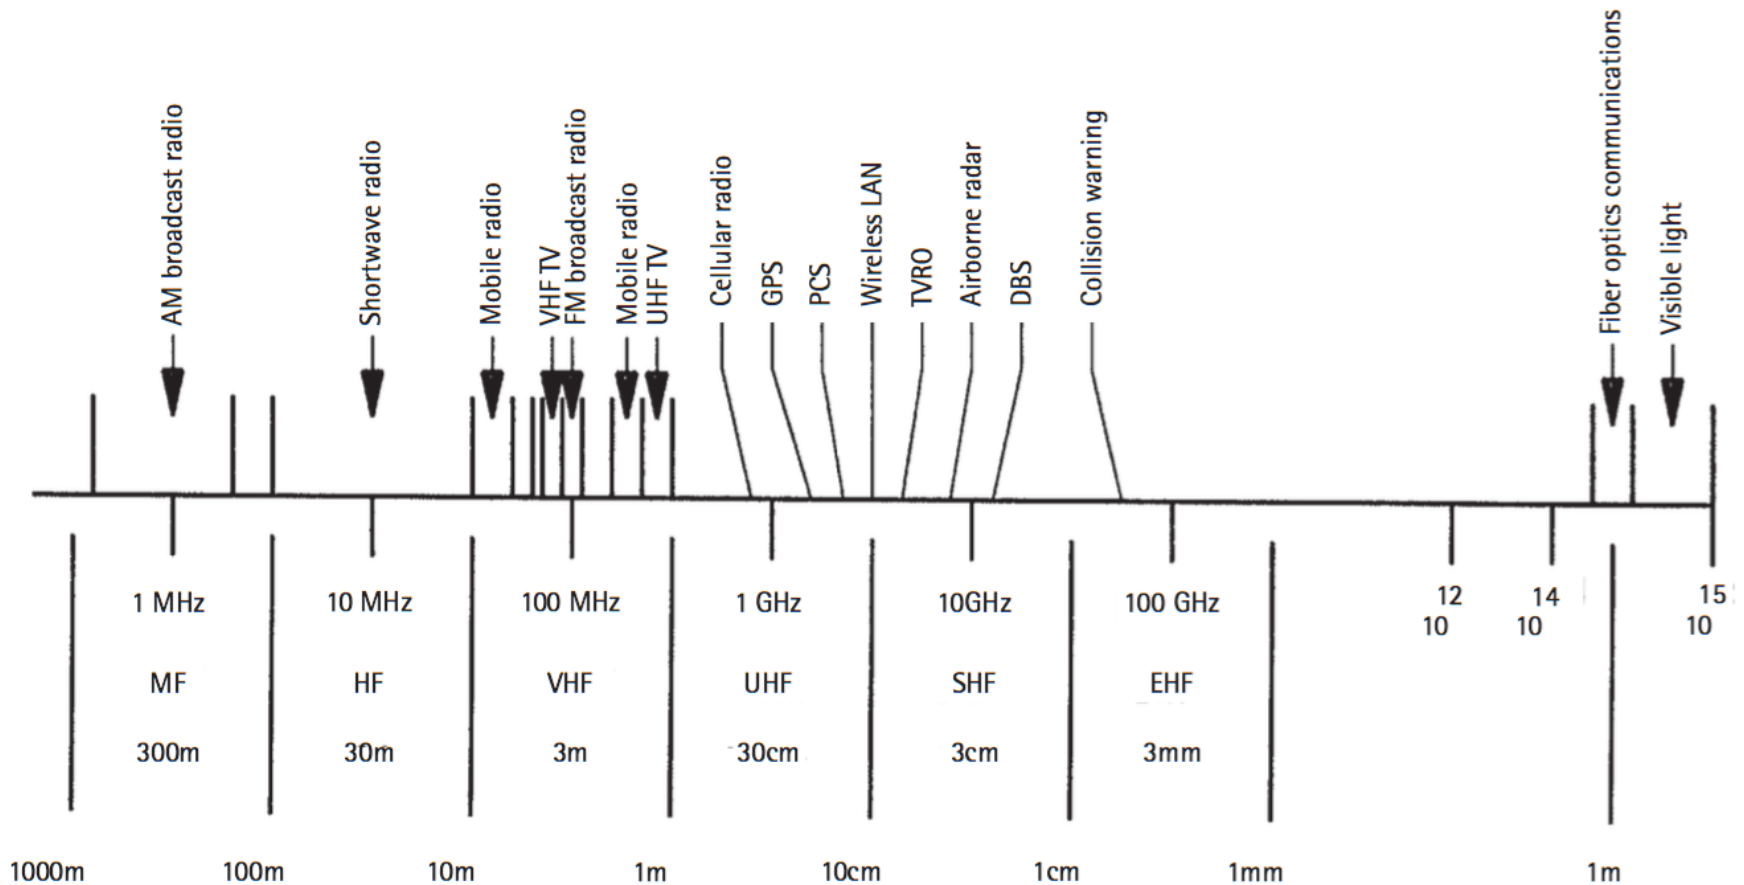




USA frequency allocation

0.3 – 3 GHz

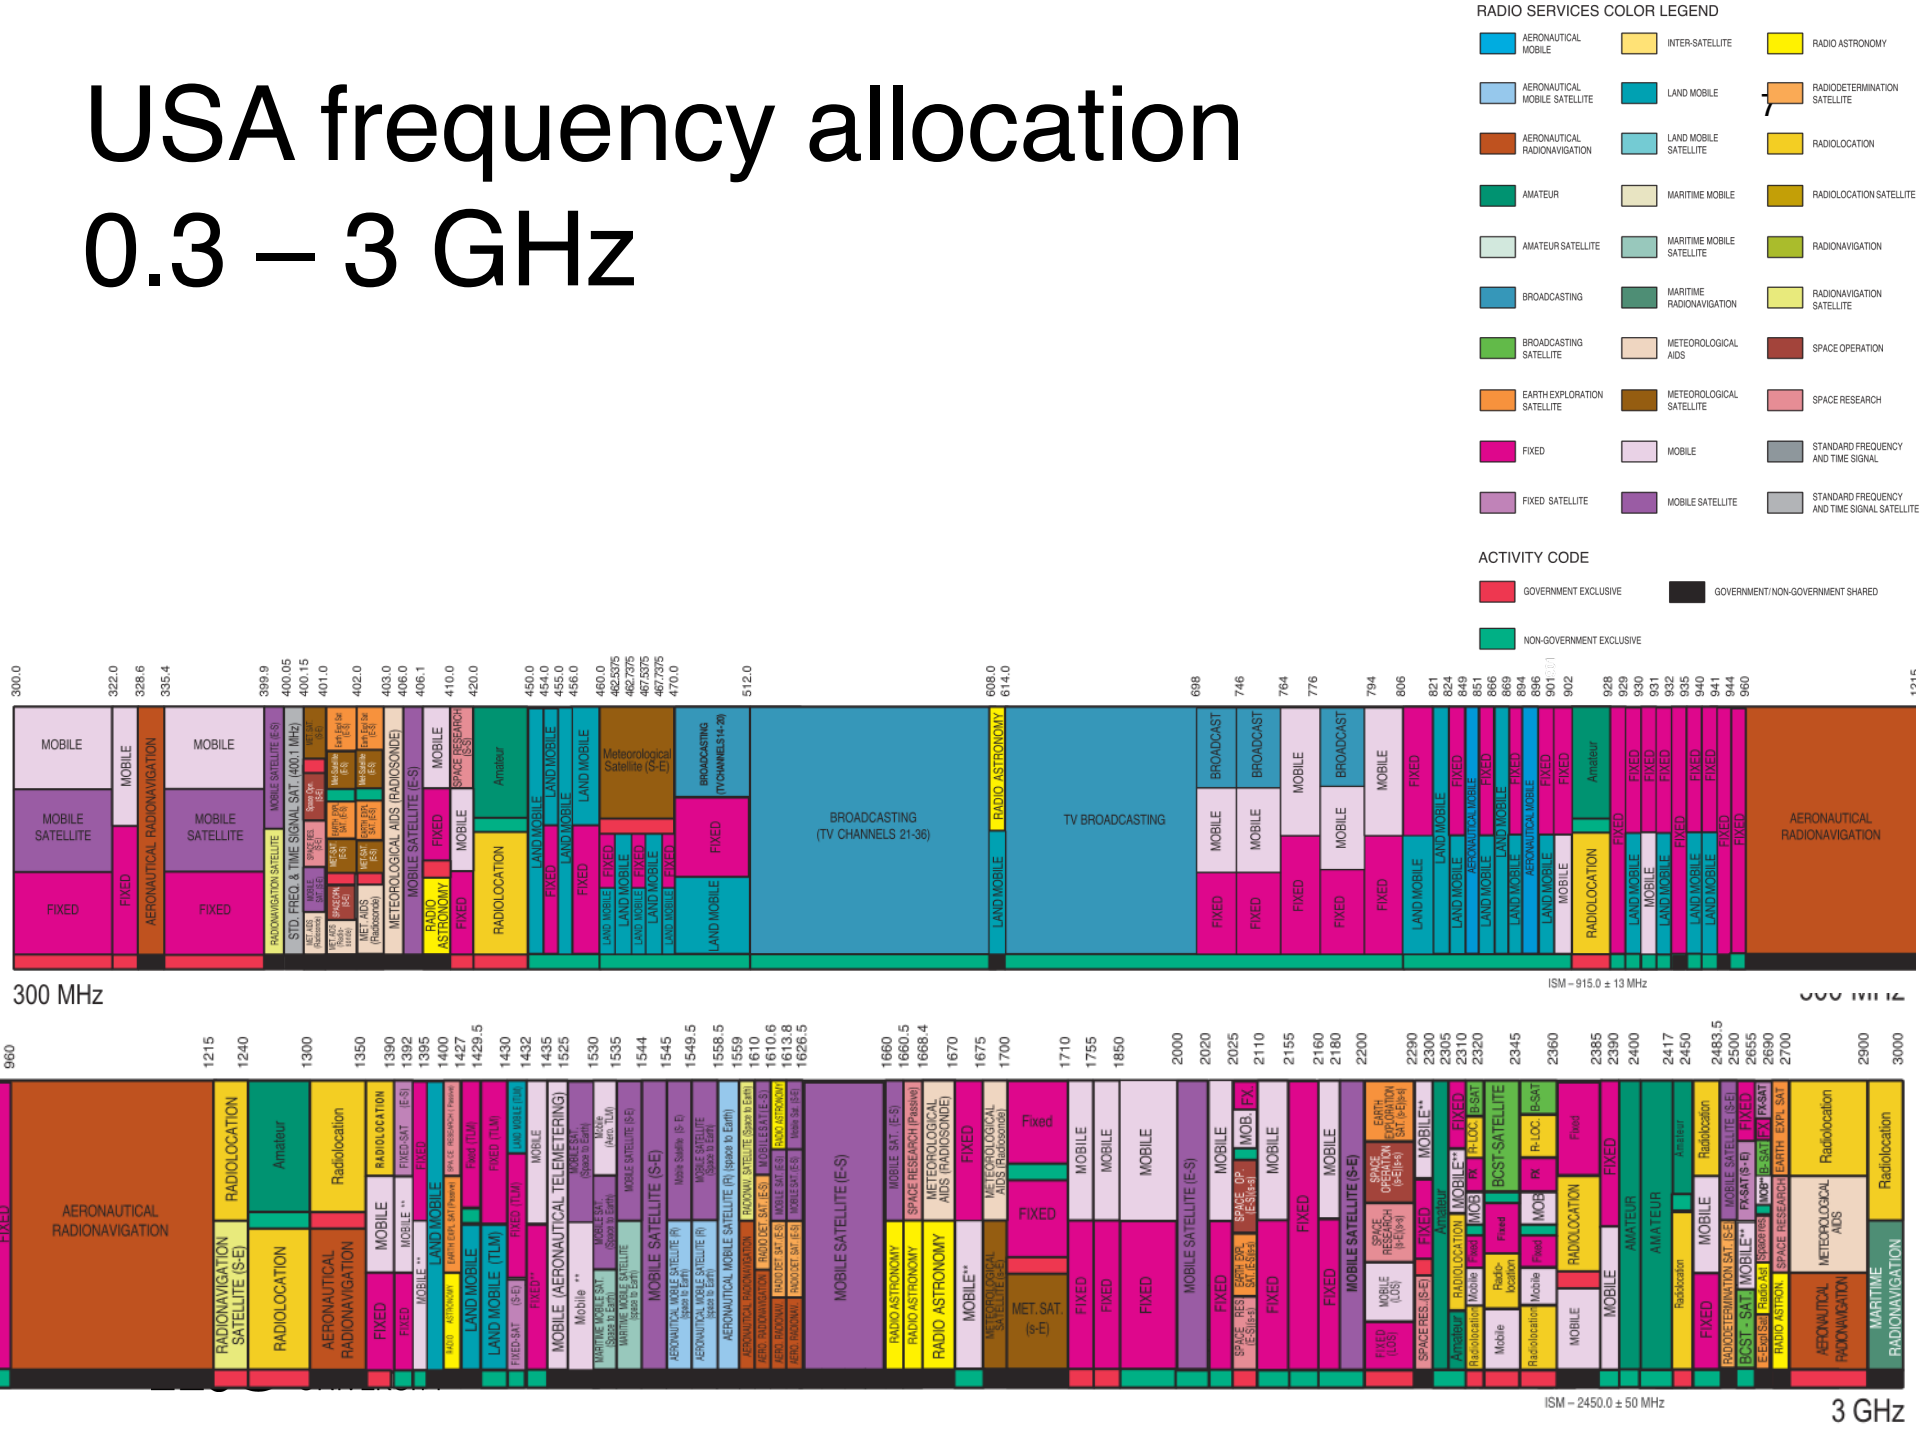


What is Modulation?

- "Information signal", $f < f_c$
- "Radio Frequency signal", $f > f_c$
- Modulation: carry the information signal on the radio frequency carrier

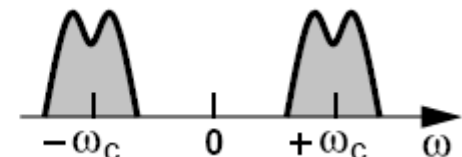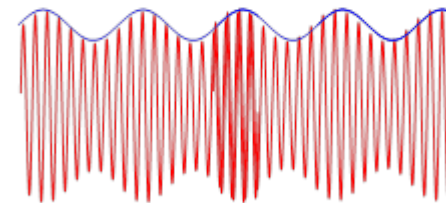


Modulation

- Modulation refers to turning information into (electrical) signals which are suitable for transmission

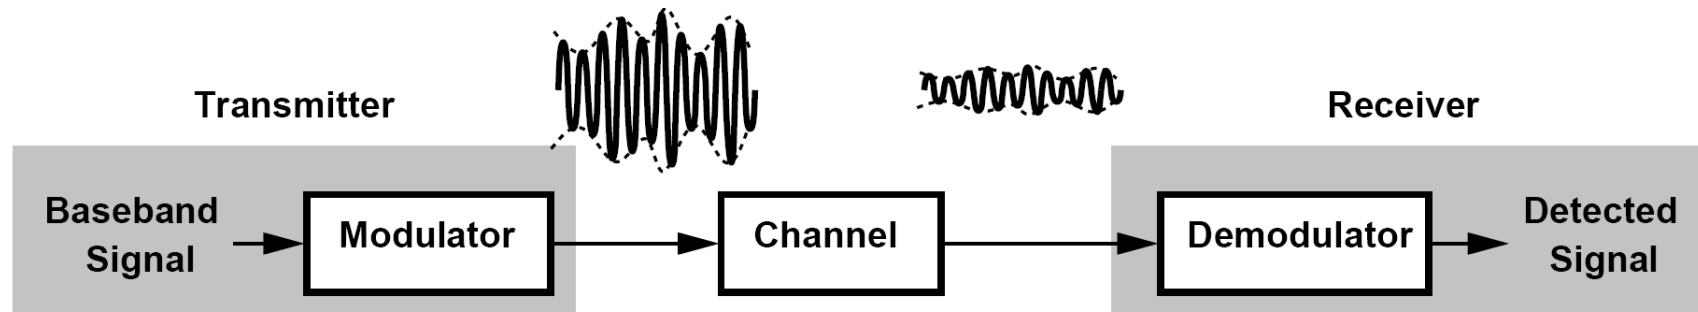


Modulation Types

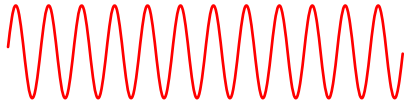- Signal properties are varied according to the information
- Properties of an RF signal 
 - Amplitude
 - Frequency
 - Phase
- This variation could be continuous (analog modulation) or in discrete steps (digital modulation)

$$A \cos (\omega t + \varphi)$$

Modulation aspects

- Detectability

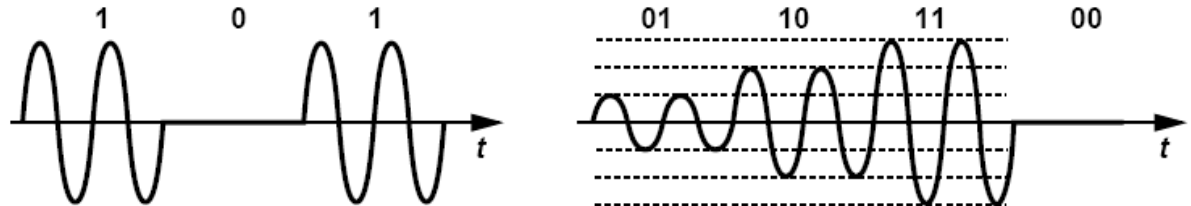

- Bandwidth efficiency
- Power efficiency
- Complexity, required bandwidth, sensitivity to noise, sensitivity to nonlinearity, ...

Not logged in | Talk | Contributions | Create account | Log in

Article | Talk | Read | Edit | View history | Search Wikipedia

This November is Wikipedia Asian month. Join the contest and win a postcard from Asia. [help with translations]

Guglielmo Marconi

From Wikipedia, the free encyclopedia

"Marconi" redirects here. For other uses, see *Marconi (disambiguation)*.

Guglielmo Marconi, 1st Marquis of Marconi (Italian: [ɡuˈlʲɛmo marˈkɔni]; 25 April 1874 – 20 July 1937) was an Italian^{[a][b][c]} inventor, and electrical engineer, known for his pioneering work on long-distance radio transmission,^[d] development of Marconi's law, and a radio telegraph system. He is credited as the inventor of radio,^[e] and he shared the 1909 Nobel Prize in Physics with Karl Ferdinand Braun "in recognition of their contributions to the development of wireless telegraphy".^{[f][g][h]}

Marconi was also an entrepreneur, businessman, and founder of The Wireless Telegraph & Signal Company in the United Kingdom in 1897 (which became the Marconi Company). He succeeded in making an engineering and commercial success of radio by innovating and building on the work of previous experimenters and physicists.^{[i][j][k]} In 1929, Marconi was ennobled as a *Marchese* (marquis) by King Victor Emmanuel III of Italy, and, in 1931, he set up the Vatican Radio for Pope Pius XI.

Contents [hide]

- 1 Biography
 - 1.1 Early years
 - 1.2 Education
 - 1.3 Radio work
 - 1.3.1 Developing radio telegraphy
 - 1.3.2 Transmission breakthrough
 - 1.3.3 The British become interested
 - 1.3.4 Transatlantic transmissions
 - 1.3.5 Titanic
 - 1.3.6 Continuing work
 - 1.4 Later years

Born

Guglielmo Giovanni Maria Marconi

25 April 1874

Palazzo Marescalchi, Bologna, Italy

Died

20 July 1937 (aged 63)

Rome, Italy

Nationality

Italian

Not logged in | Talk | Contributions | Create account | Log in

Article | Talk | Read | View source | View history | Search Wikipedia

This November is Wikipedia Asian month. Join the contest and win a postcard from Asia. [help with translations]

Nikola Tesla

From Wikipedia, the free encyclopedia


For other uses, see *Nikola Tesla (disambiguation)*.

Nikola Tesla (/ˈtɛslə/^[a]; Serbo-Croatian: [nikɔla tɛsla]; Serbian Cyrillic: Николa Тесла;^[a] 10 July 1856 – 7 January 1943) was a Serbian-American^{[b][c][d]} inventor, electrical engineer, mechanical engineer, and futurist who is best known for his contributions to the design of the modern alternating current (AC) electricity supply system.^[7]

Born and raised in the Austrian Empire, Tesla studied engineering and physics in the 1870s without receiving a degree, and gained practical experience in the early 1880s working in telephony and at Continental Edison in the new electric power industry. He emigrated in 1884 to the United States, where he would become a naturalized citizen. He worked for a short time at the *Edison Machine Works* in New York City before he struck out on his own. With the help of partners to finance and market his ideas, Tesla set up laboratories and companies in New York to develop a range of electrical and mechanical devices. His *alternating current* (AC) *induction motor* and related *polyphase* AC patents, licensed by *Westinghouse Electric* in 1888, earned him a considerable amount of money and became the cornerstone of the polyphase system which that company would eventually market.

Attempting to develop inventions he could patent and market, Tesla conducted a range of experiments with mechanical oscillators/generators, electrical discharge tubes, and early X-ray imaging. He also built a wireless-controlled boat, one of the first ever exhibited. Tesla became well known as an inventor and would demonstrate his achievements to celebrities and wealthy patrons at his lab, and was noted for his showmanship at public lectures. Throughout the 1890s, Tesla pursued his ideas for wireless lighting and worldwide wireless electric power distribution in his high-voltage, high-frequency power experiments in New York and *Colorado Springs*. In 1893, he made pronouncements on the possibility of *wireless communication* with his devices. Tesla tried to put these ideas to practical use in his unfinished *Wardenclyffe Tower* project, an intercontinental wireless communication and power transmitter, but ran out of funding before he could complete it.^[8]

Nikola Tesla



Tesla c. 1896

Born

10 July 1856

Smiljan, Austrian Empire (modern-day Croatia)

Died

7 January 1943 (aged 86)

New York City, United States

Resting

Nikola Tesla Museum, Belgrade,

- Marconi is usually claimed to be the inventor of radio transmissions.
- Tesla (otherwise known for AC) also demonstrated early (1893) wireless communication and wireless power transfer.

- Marconi used a "spark-gap transmitter", which is an obsolete type of radio transmitter which generates radio waves by means of an electric spark.
- A fundamental limitation of spark-gap transmitters is that they generate a series of brief transient pulses of radio waves called damped waves; they are unable to produce the continuous waves used to carry audio (sound) in modern AM or FM radio transmission.
- So spark-gap transmitters could not transmit audio, and instead transmitted information by radiotelegraphy.
- The operator switched the transmitter on and off with a telegraph key, creating pulses of radio waves to spell out text messages in Morse code.

[Wikipedia]




An Overview of Modulation Techniques:

chapter 3.1 – 3.3.1



- Introduction
- **Analog Modulation**
 - Amplitude Modulation (3.2.1)**
 - Phase and Frequency Modulation
- Digital Modulation
- Bandwidth considerations

Amplitude Modulation (AM)

- Multiplication of a baseband signal with a single-tone sinusoidal (called the carrier)

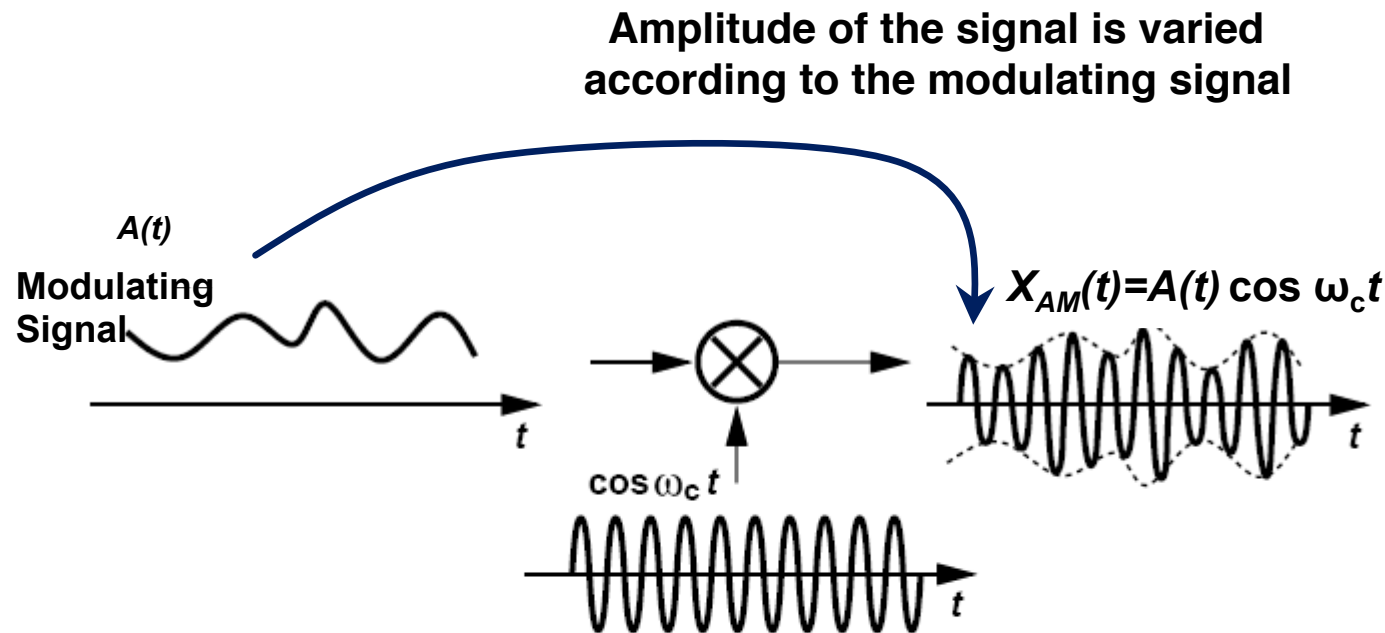


Amplitude Modulation in frequency domain

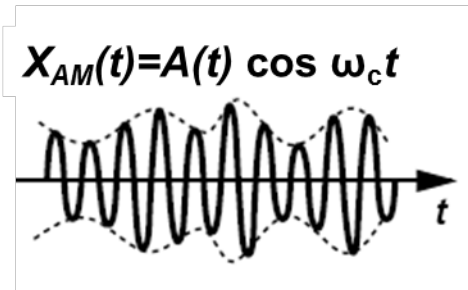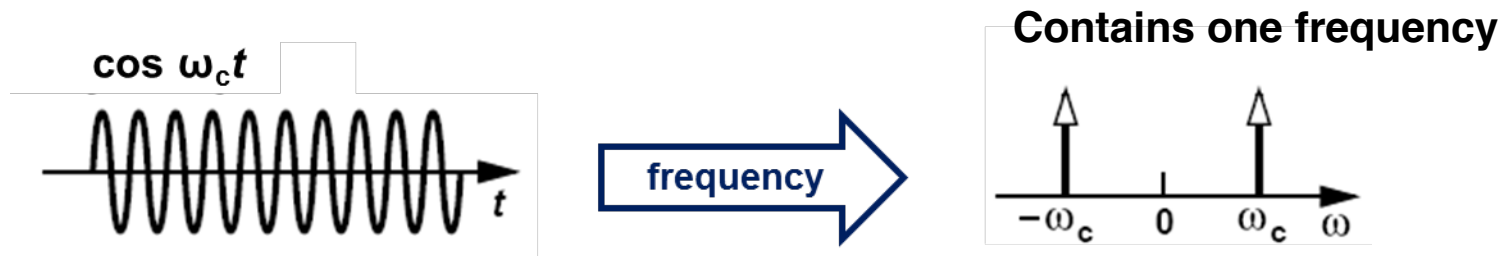

Multiplication in the time-domain corresponds to convolution in frequency-domain


Zero will be shifted to the carrier frequency

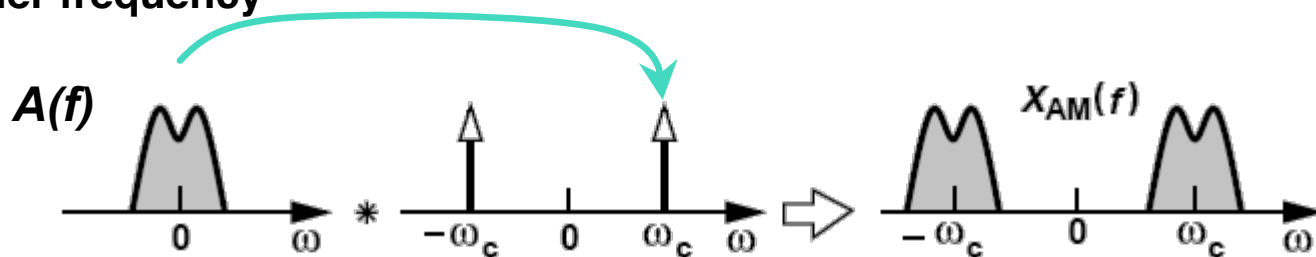

Fundamental

- A mixer basically multiplies two signals in the time domain. From this perspective mixing can occur in any nonlinear device.


$$(A \cos \omega_1 t) * (B \cos \omega_2 t) = AB/2[(\cos(\omega_1 - \omega_2)t) + (\cos(\omega_1 + \omega_2)t)]$$

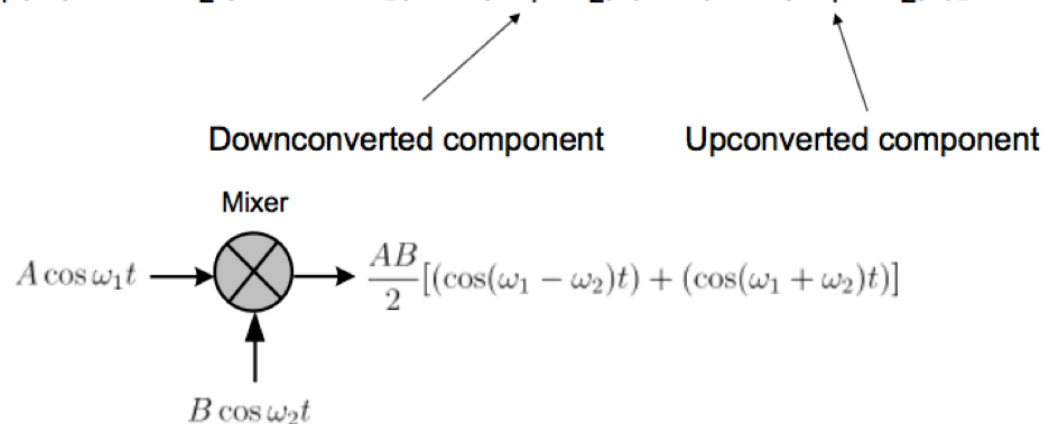



Amplitude Modulation/Frequency Conversion

this part is called
Lower SideBand (LSB)

this part is called
Upper SideBand (USB)

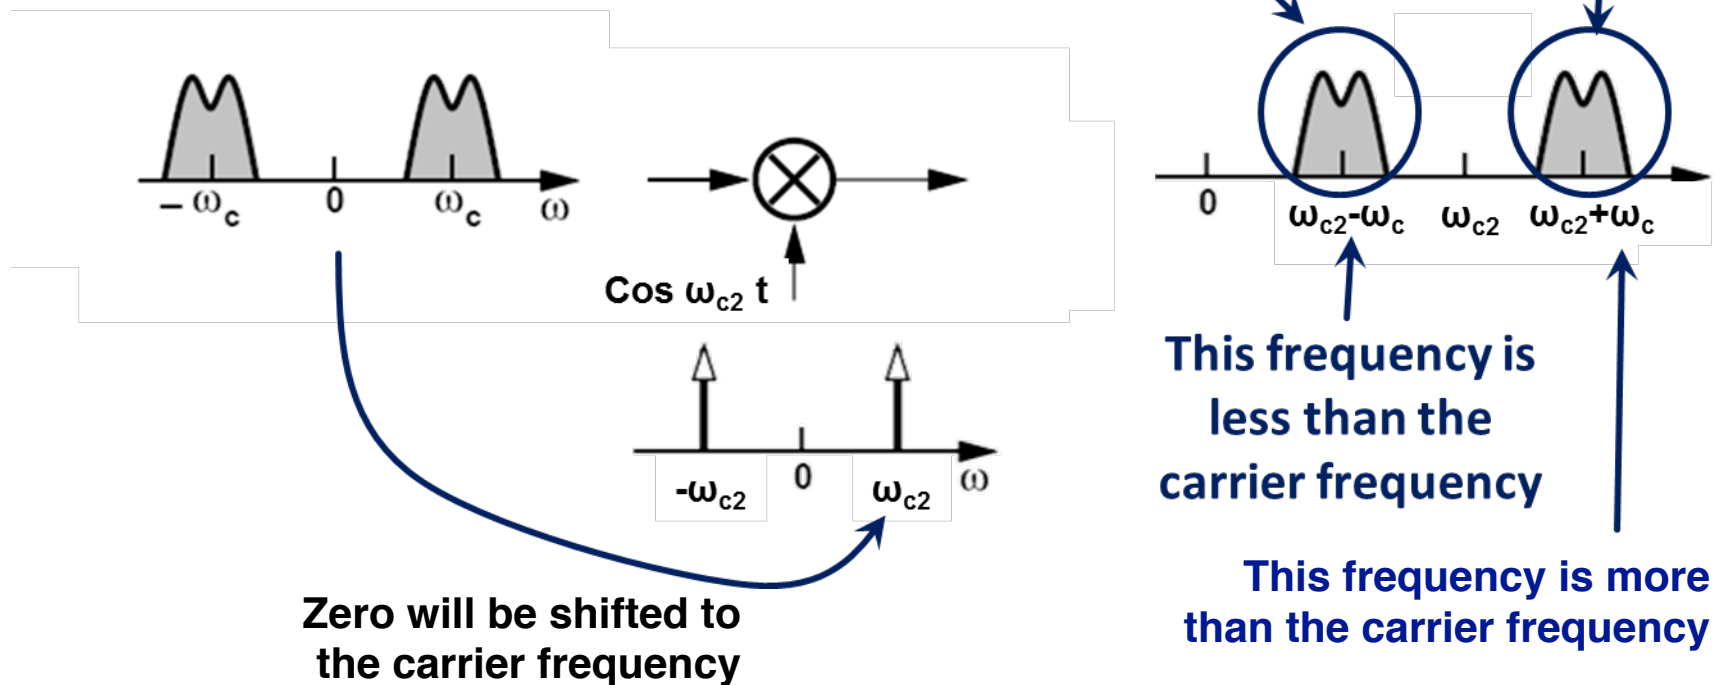

Amplitude Modulation/Frequency Conversion

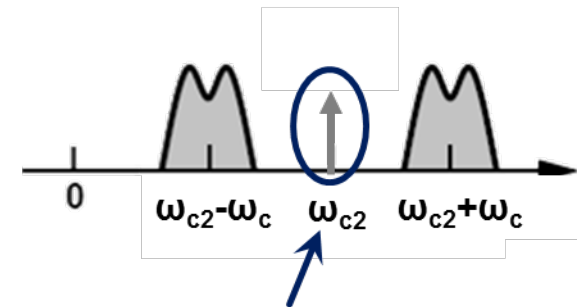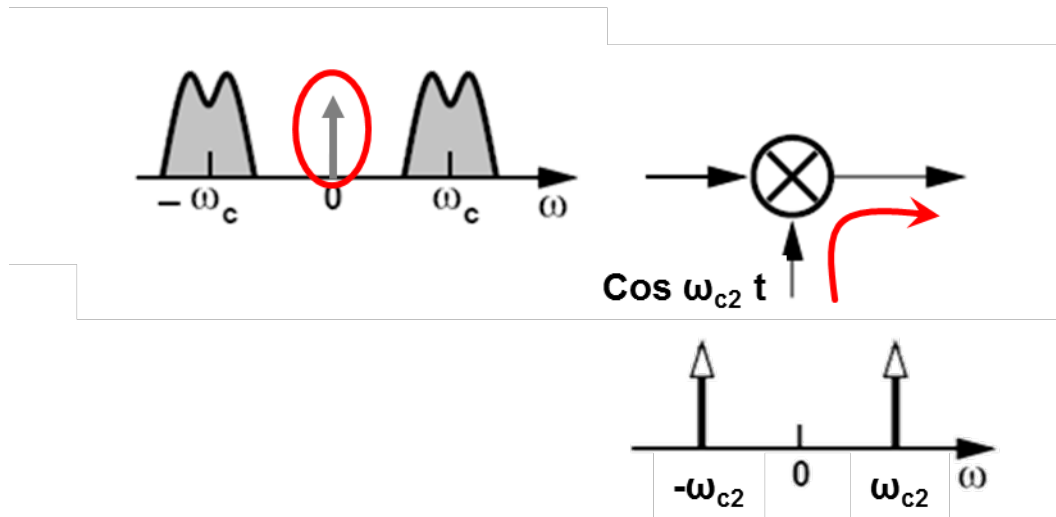

A signal with the carrier frequency might also exist at the output.

Possible causes are:

- 1. DC component at the input**
- 2. Leakage**


AM Variants

- Variants of AM are
 - Double-sideband
 - Double-sideband suppressed-carrier (DSB-SC)
 - Single-Sideband (SSB)


Main problems to be solved: higher bandwidth,
reduce power (wasted in the sidebands or carrier)

Amplitude Modulation (AM)

- Multiplication of a baseband signal with a single-tone sinusoidal (called the carrier)

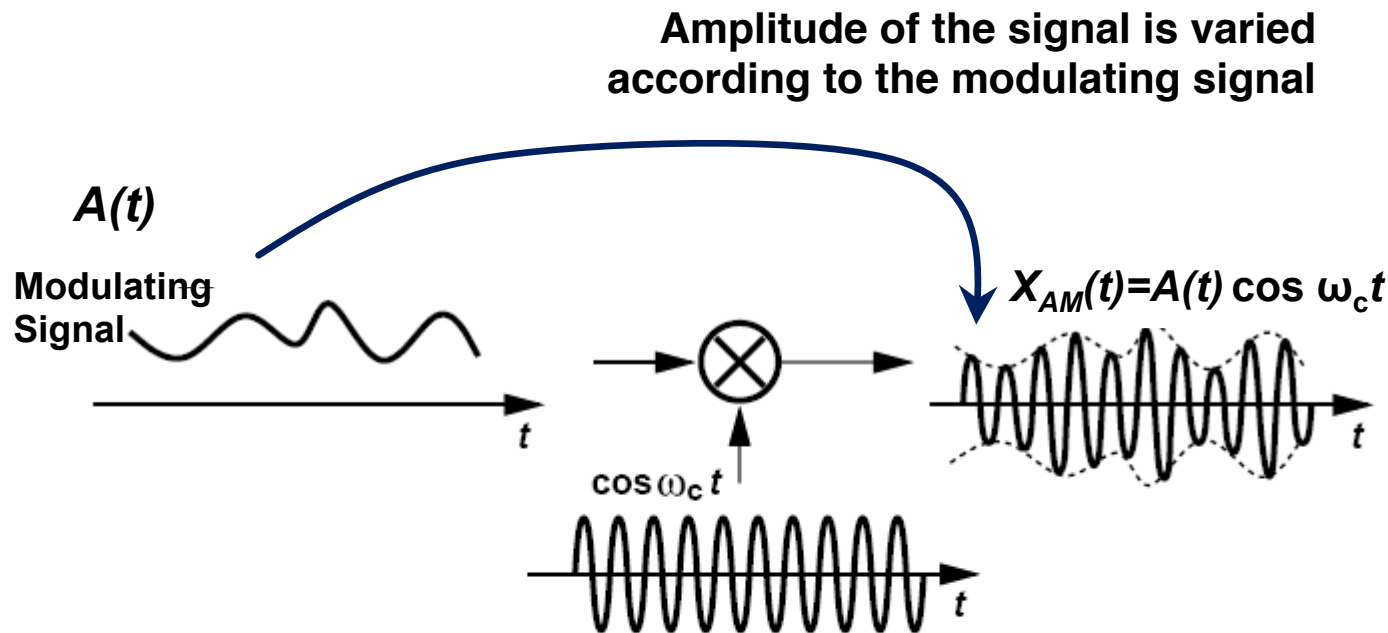


Amplitude Detection (demodulation)

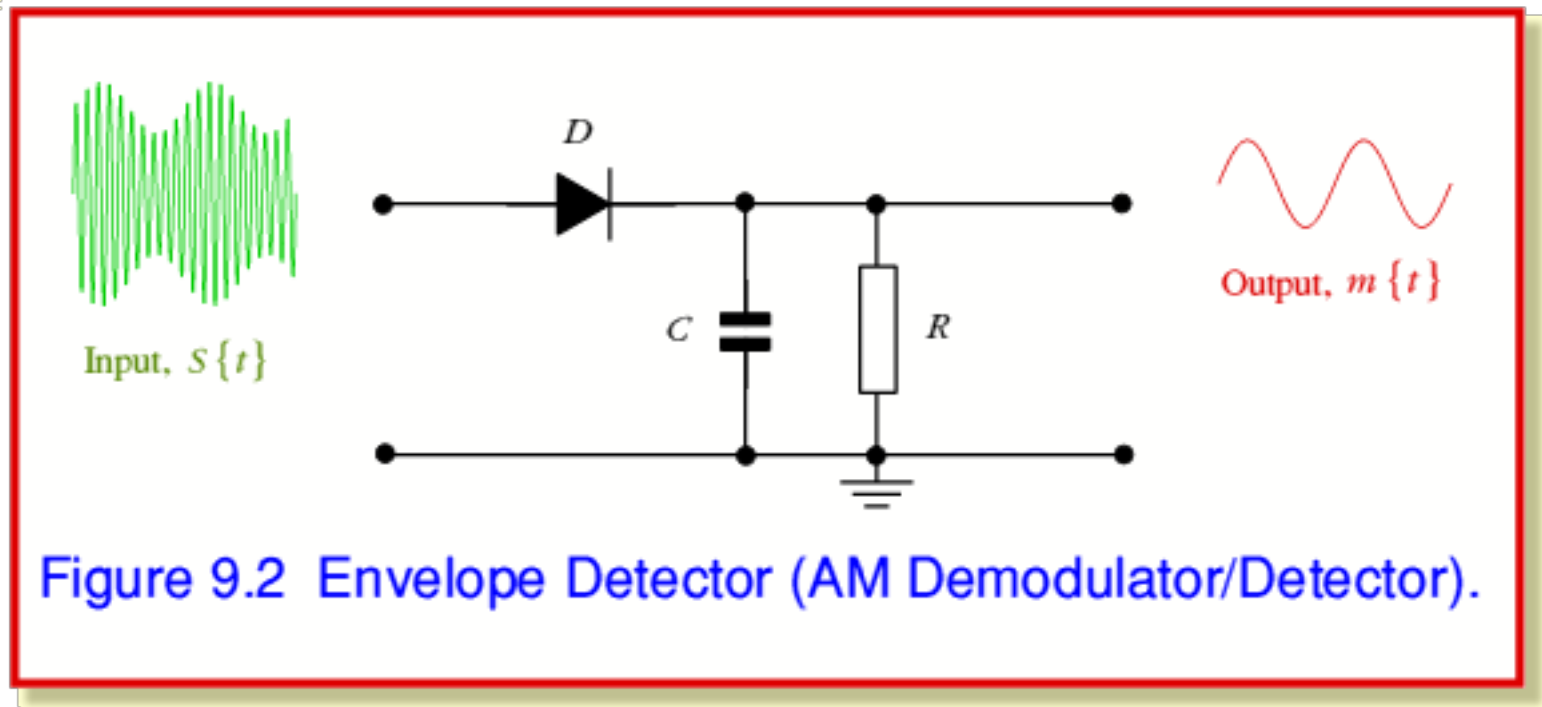


AM Radios



- Frequency (typ): 500 – 1700 kHz

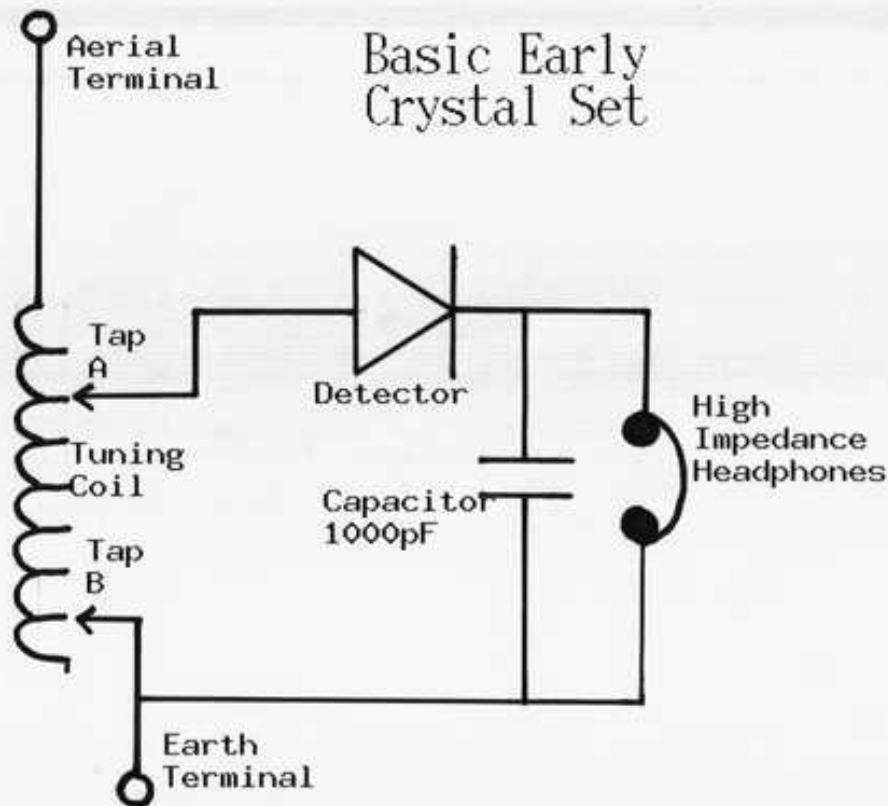

1970s-era crystal radio marketed to children. The earphone is on left. The antenna wire, right, has a clip to attach to metal objects such as a bedspring, which serve as an additional antenna to improve reception.

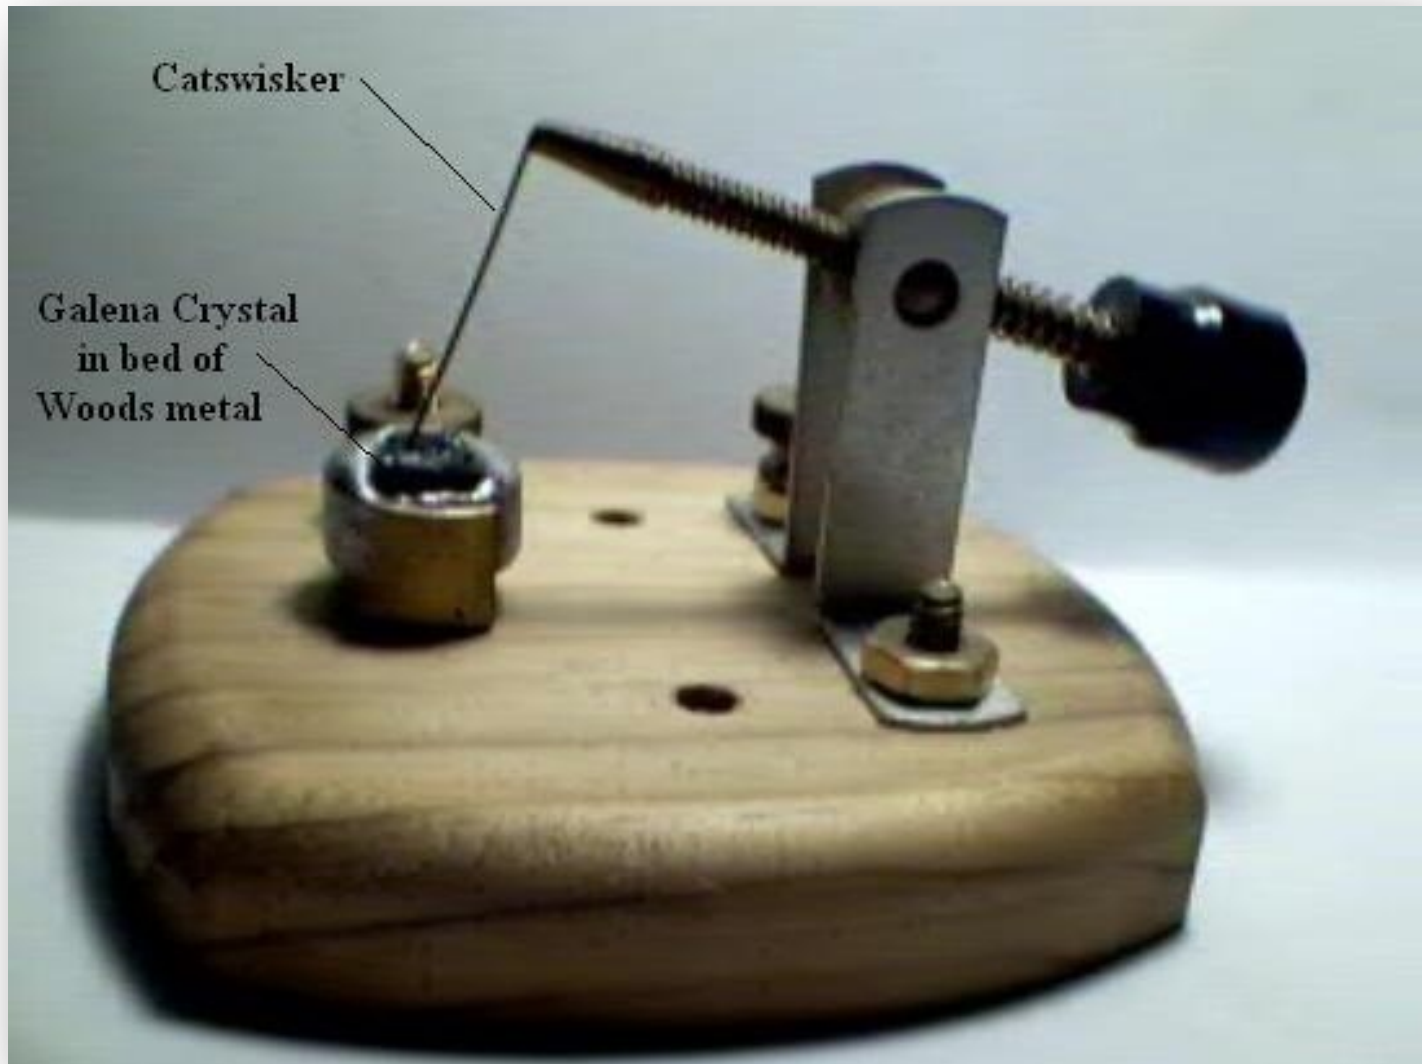



Those were the days....



WONDER HOW TO

STEAMPUNK R&D

[WONDERHOWTO](#)[GADGET HACKS](#)[NEXT REALITY](#)[NULL BYTE](#)[R&D PODCASTS](#)[FOR SALE](#)[NEW HERE? INTRODUCE YOURSELF!](#)[IMPROVEMENTS/SUGGESTIONS](#)[GADGET HACKS](#)[FOOD HACKS DAILY](#)[HOW TO](#)

The Complete Guide on How to Build a Crystal Radio—Plus How They Work

BY AUSTIN SIRKIN © 01/04/2013 3:04 AM

There's a lot that goes into making a nice crystal radio set, so this is going to have to be broken down into two parts. The first part is the actual making of a functional radio, and the second part is making the whole arrangement look nice. In this part

 HOT

An Overview of Modulation Techniques:

chapter 3.1 – 3.3.1

- Introduction
- Analog Modulation
 - Amplitude Modulation
 - Phase and Frequency Modulation (3.2.2)**
- Digital Modulation
- Bandwidth considerations

Phase and Frequency Modulation

- In the most general form an RF signal can be represented as

$$S(t) = A \cos \phi(t)$$

- $\phi(t)$ is called total phase
- Instantaneous frequency is defined as $d\phi(t)/dt$
- In this respect, phase and frequency modulation are essentially the same, except for an integration


PM

FM

$$x_{PM}(t) = A_c \cos[\omega_c t + m x_{BB}(t)] \quad x_{FM}(t) = A_c \cos[\omega_c t + m \int_{-\infty}^t x_{BB}(\tau) d\tau]$$

Phase and Frequency Modulation

- Typical FM/PM waveform

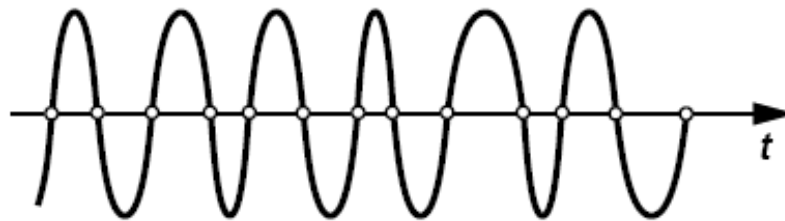

- Note:
 - Amplitude is constant (immune to noise)
 - Data is contained in zero crossing intervals
 - The modulated signal has (theoretically) infinite bandwidth



5,000,000 ARTICLES
WIKIPEDIA
The Free Encyclopedia

Main page
Contents
Featured content
Current events
Random article
Donate to Wikipedia
Wikipedia store

Interaction
Help
About Wikipedia
Community portal
Recent changes
Contact page

Tools
What links here
Related changes
Upload file
Special pages
Permanent link
Page information
Wikidata item
Cite this page

Print/export

Article Talk

Read Edit View history

Search

Edwin Howard Armstrong

From Wikipedia, the free encyclopedia
(Redirected from [Edwin H. Armstrong](#))

Edwin Howard Armstrong (December 18, 1890 – January 31, 1954) was an American [electrical engineer](#) and [inventor](#). He has been called "the most prolific and influential inventor in radio history".^[2] He invented the [regenerative circuit](#) while he was an undergraduate and [patented](#) it in 1914, followed by the super-regenerative circuit in 1922, and the [superheterodyne receiver](#) in 1918.^[3] Armstrong was also the inventor of modern [frequency modulation](#) (FM) radio transmission.

Armstrong was born in New York City, New York, in 1890. He studied at [Columbia University](#) where he was a member of the Epsilon Chapter of the [Theta Xi Fraternity](#). He later became a professor at Columbia University. He held 42 patents and received numerous awards, including the first [Institute of Radio Engineers](#) now [IEEE Medal of Honor](#), the French [Legion of Honor](#), the 1941 [Franklin Medal](#) and the 1942 [Edison Medal](#). He is a member of the [National Inventors Hall of Fame](#) and the [International Telecommunications Union](#)'s roster of great inventors.

Contents [hide]

- Early life
- Early work
- FM radio
- Personal life
- Suicide
- Legacy
- Honors
- Patents

Edwin H. Armstrong



EDWIN H. ARMSTRONG
1890–1954

Developed and advanced the utility of FM technology.

Born December 18, 1890
[Chelsea, Manhattan, New York, New York, U.S.](#)^[1]

Armstrong invented the frequency modulator in 1933

FM Radio




- Frequency (typ): 88 – 104 MHz

An Overview of Modulation Techniques:


chapter 3.1 – 3.3.1

- Introduction
- Analog Modulation
 - Amplitude Modulation
 - Phase and Frequency Modulation
- **Digital Modulation (3.2)**
- Bandwidth considerations

Digital Modulation



Analog
Amplitude Modulation (AM)

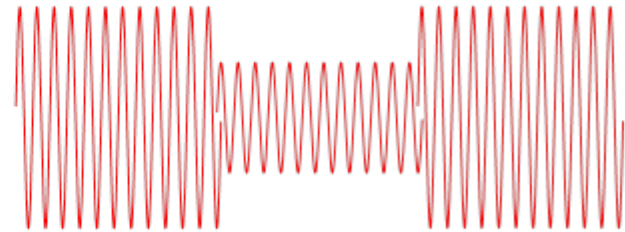


Digital
Amplitude Shift Keying (ASK)

Digital Modulation is more immune to noise
=> can work with a smaller Signal-to-Noise
Ratio (SNR)

Binary Digital Modulation


35

ASK

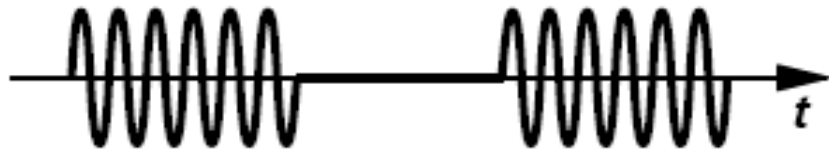

Binary Amplitude Shift Keying (ASK)

PSK

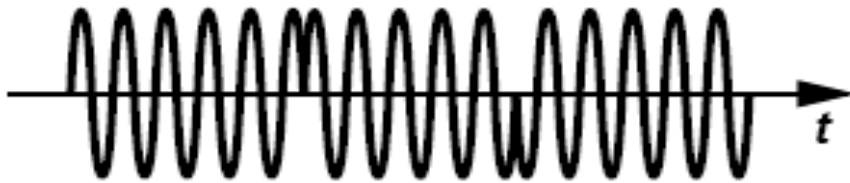

Binary Phase Shift Keying (PSK)


FSK




Binary Frequency Shift Keying (FSK)

Binary Digital Modulation


- ASK

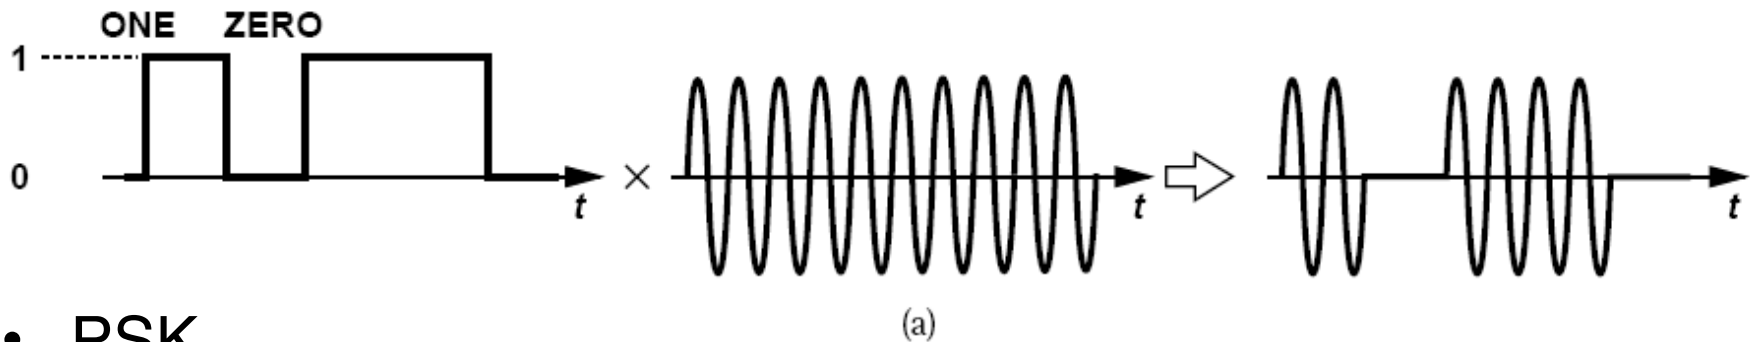

- PSK

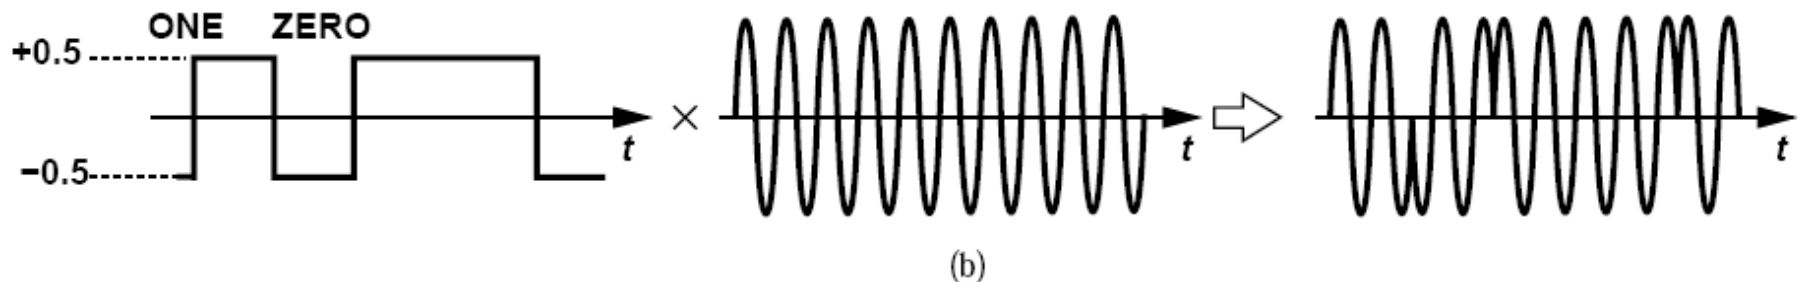

- Keying!

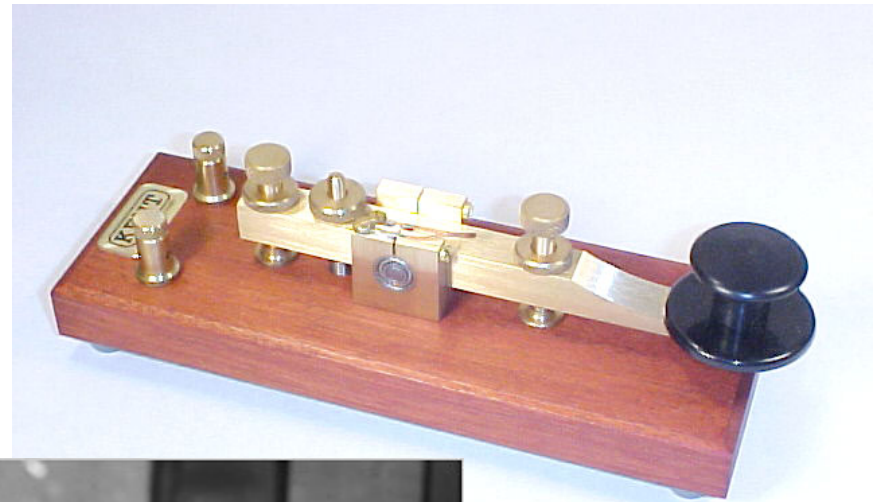



An Overview of Modulation Techniques:

chapter 3.1 – 3.3.1

- Introduction
- Analog Modulation
 - Amplitude Modulation
 - Phase and Frequency Modulation
- Digital Modulation
- **Bandwidth considerations (3.3.1)**

Bandwidth



- Linear time-invariant systems can "distort" a signal if they do not provide sufficient bandwidth

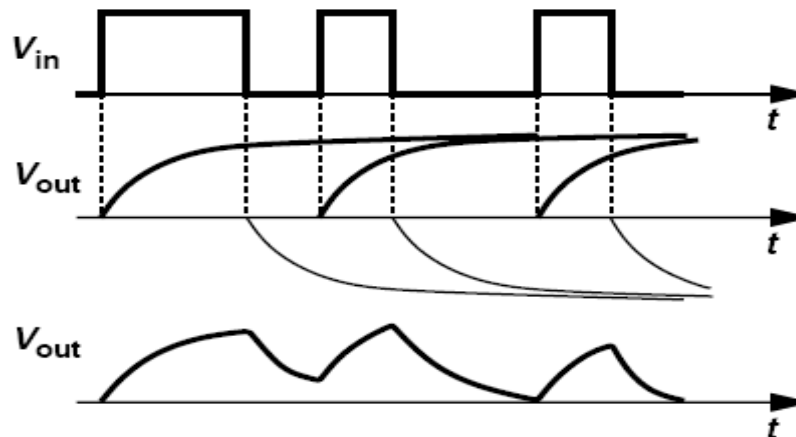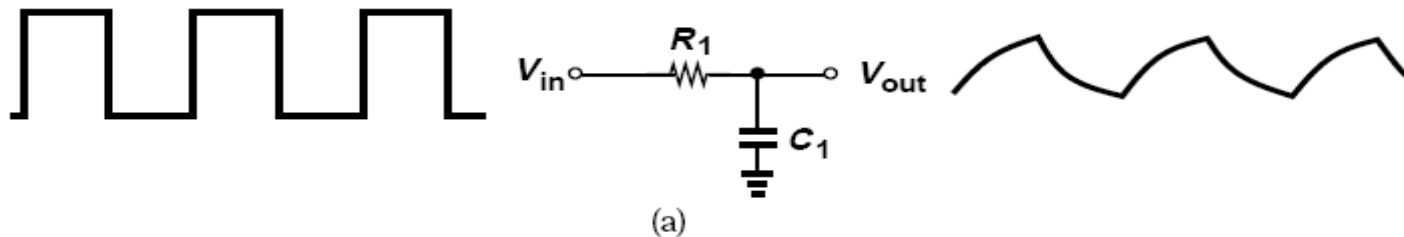

Each pulse extends in time and spills to the time slot of other pulses. This is called Inter Symbol Interference (ISI).


Bandwidth

- What is the bandwidth of a random pulse stream (Ex. 3.5)?
 - It extends as a sinc² function $\text{sinc}(x) = \frac{\sin(\pi x)}{\pi x}$.
 - The main lobe stops at $R_b = 1/T_b$ (T_b is the bitrate)

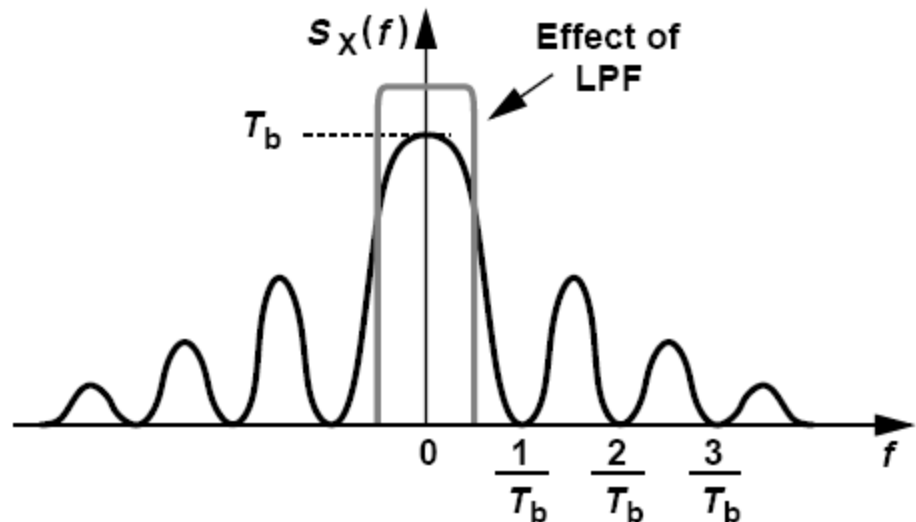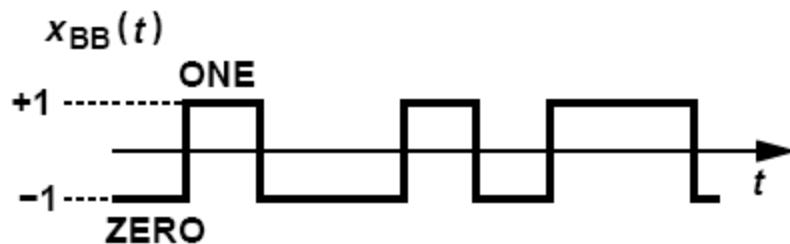

Bandwidth


- What is the bandwidth of a Binary PSK (BPSK) signal?
 - BPSK can be expressed as multiplication of a pulse stream and a sinusoidal

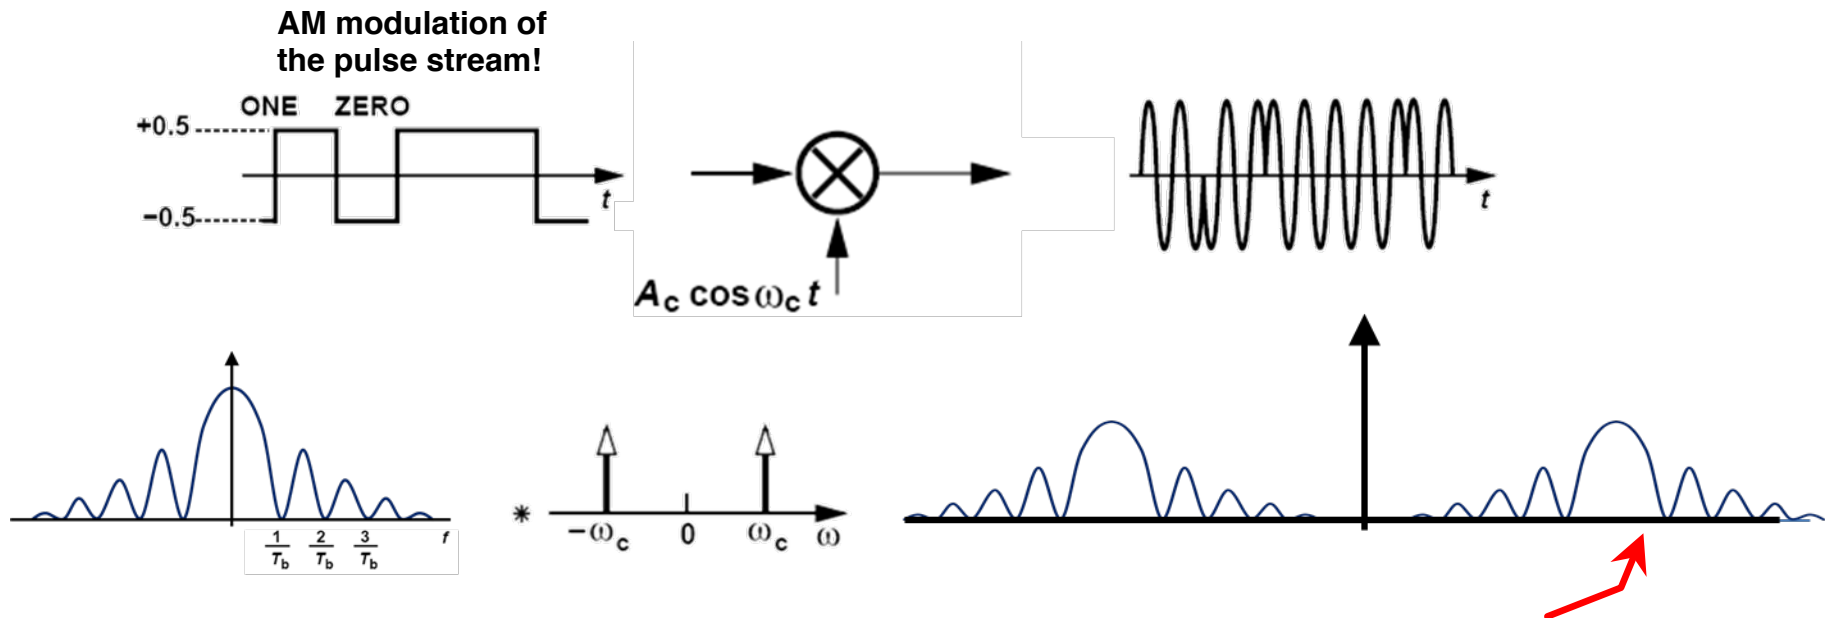

Regulations do not allow us to transmit a signal with unlimited bandwidth!

Inter-Symbol-Interference (ISI)

- We need to limit the bandwidth of the baseband signal
- What happens if we just limit the bandwidth by filtering?

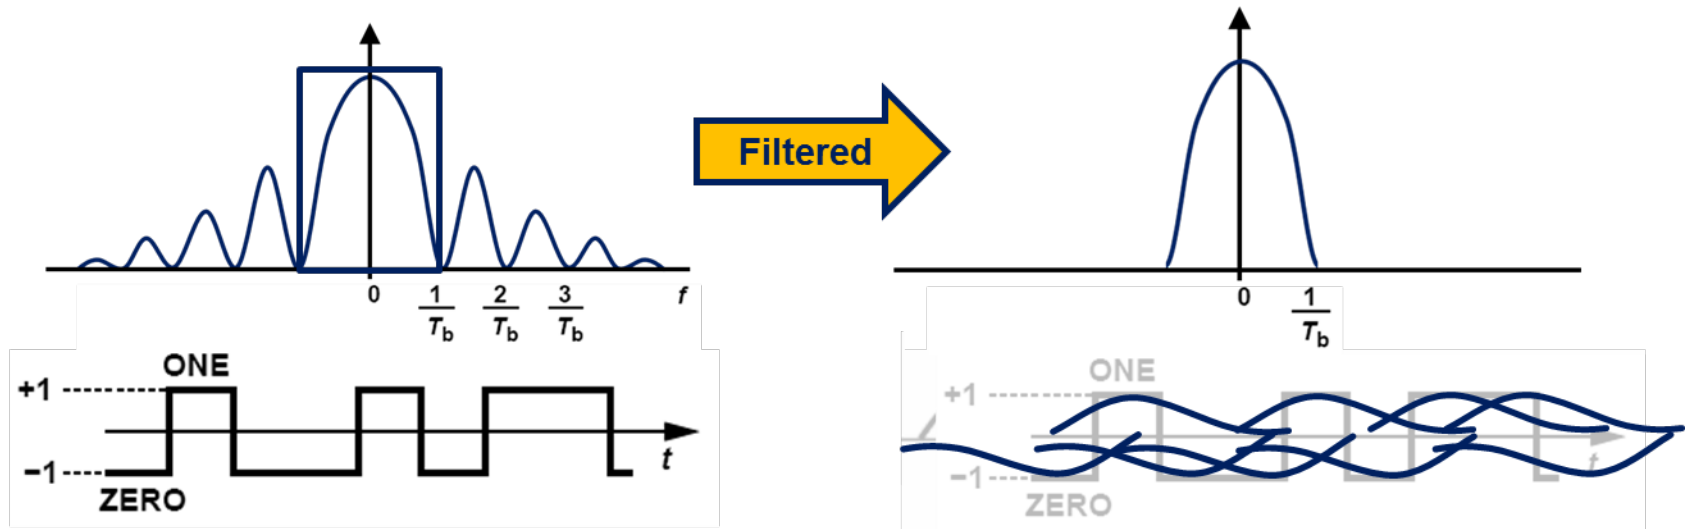


Each pulse extends in time and spills to the time slot of other pulses. This is called Inter Symbol Interference (ISI).

ISI results in distortion and error in detection



Pulse Shaping

- Instead of just filtering the signal, we can shape the pulses to occupy less bandwidth
- Smoother pulses take less bandwidth

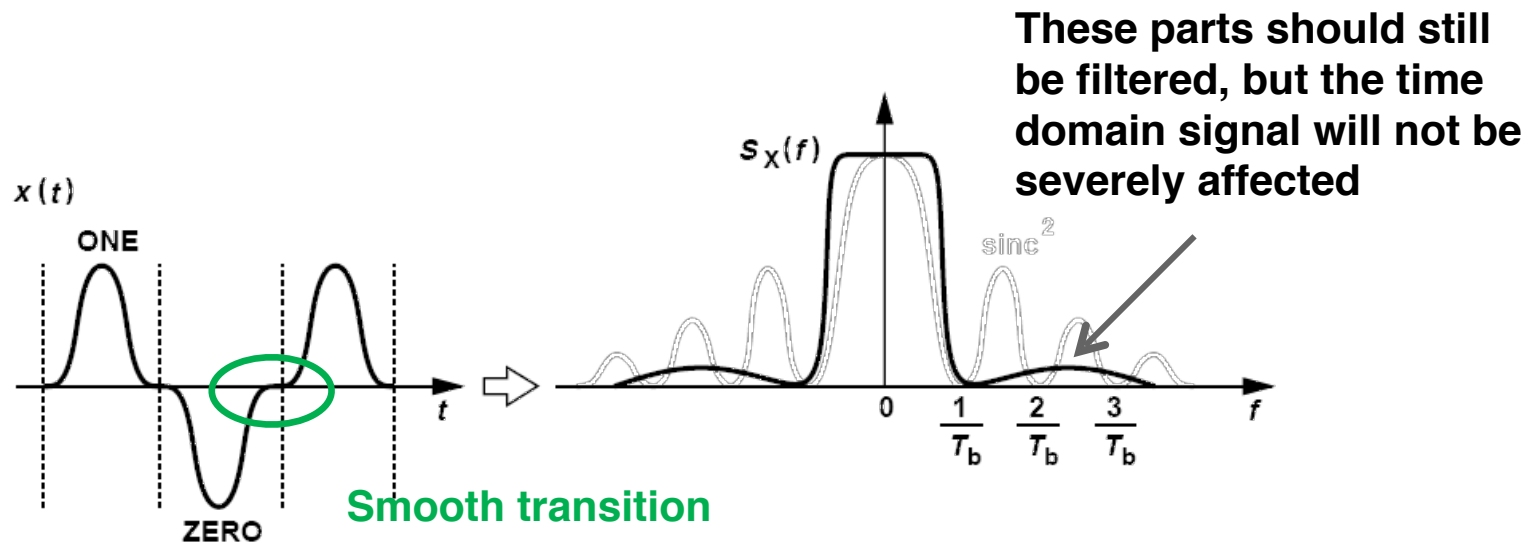

Pulse Shaping – Nyquist Pulse


- *Harry Nyquist* noticed that pulses may extend beyond the symbol period but in order to avoid ISI, their value should be zero in the middle of other pulses.
- So he proposed a smart pulse shape:
 - Notice that this is in time domain
- By using this pulse, no ISI will be introduced

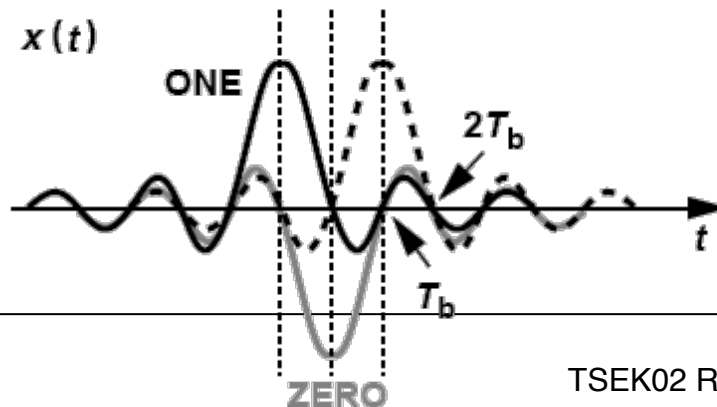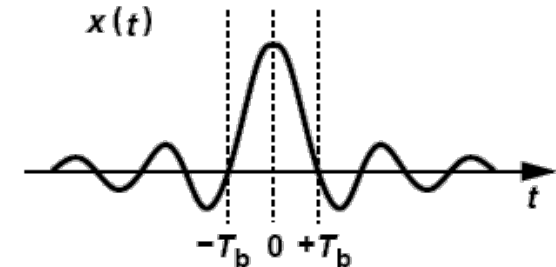

Optimum Bandwidth


- *Nyquist* pulse not only removes ISI but also results in the minimum bandwidth for the modulated signal.
- With *Nyquist* pulse, the modulated RF signal occupies $R_b = 1/T_b$ Hz

The absolute theoretical minimum bandwidth required to transmit R_b pulses per second!

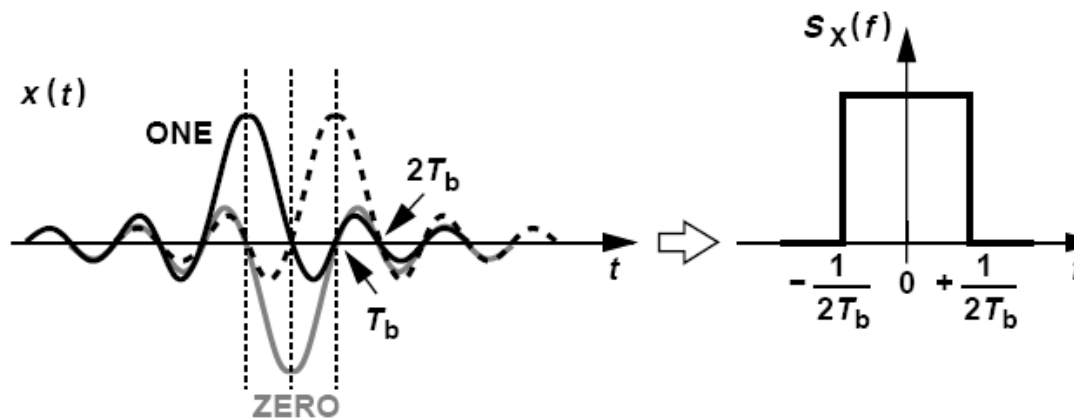

Raised Cosine Pulse


- In practice, generating *Nyquist* pulses are very difficult so other similar pulses are used, such as the Raised Cosine

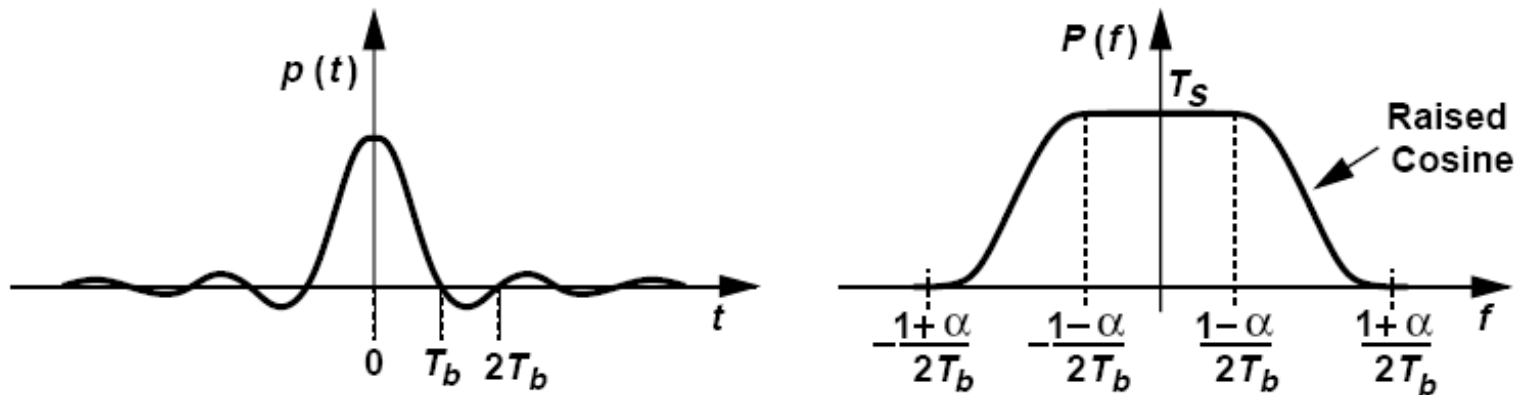


$$p(t) = \frac{\sin(\pi t/T_S)}{\pi t/T_S} \frac{\cos(\pi \alpha t/T_S)}{1 - 4\alpha^2 t^2/T_S^2}$$

$0 < \alpha < 1$ is the roll-off factor, typical values: 0.3 - 0.5

ISI

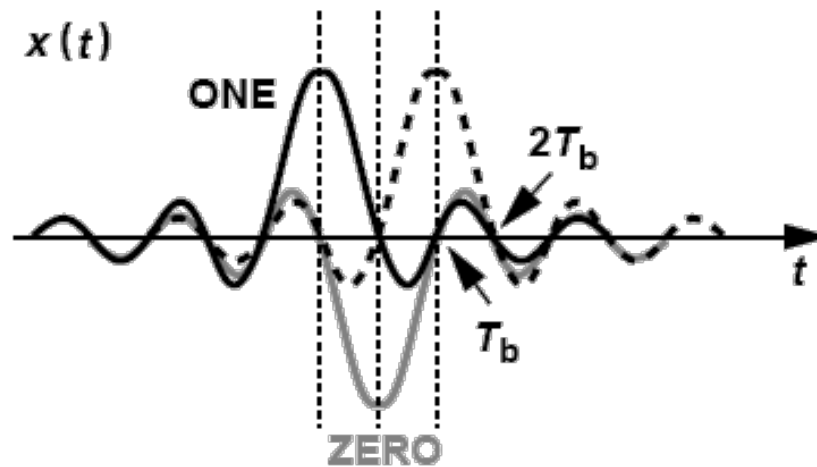

Nyquist pulse

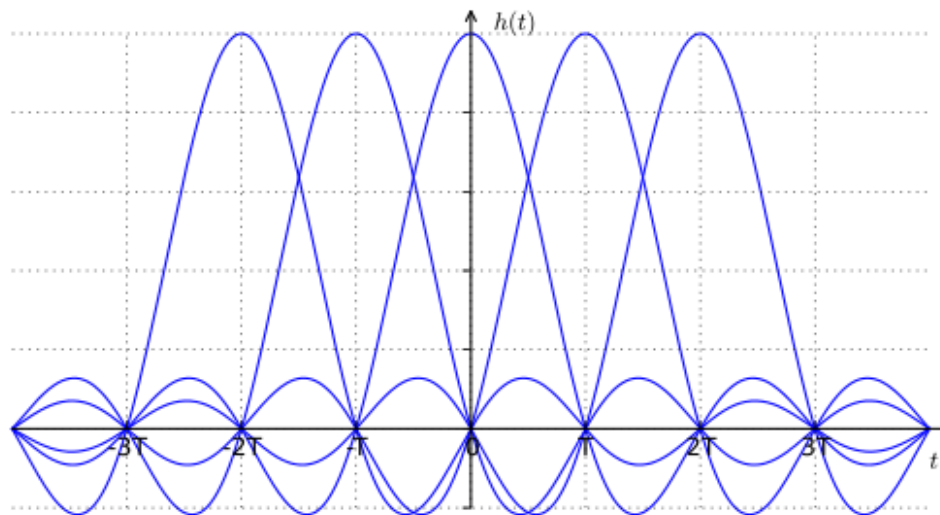

Consecutive
raised-cosine
impulses,
demonstrating
zero-ISI property



WIKIPEDIA
The Free Encyclopedia

Main page
Contents
Featured content
Current events
Random article
Donate to Wikipedia
Wikipedia store

Interaction
Help
About Wikipedia
Community portal
Recent changes
Contact page

Tools
What links here
Related changes
Upload file
Special pages
Permanent link
Page information
Wikidata item
Cite this page

Print/export
Create a book
Download as PDF
Printable version

Languages
العربية
বাংলা
ગુજરાતી

Article **Talk** Read Edit View history

Harry Nyquist

From Wikipedia, the free encyclopedia

Harry Nyquist (né Harry Theodor Nyqvist; /ˈnaɪkwɪst/, Swedish: [nʏːkvɪst]; February 7, 1889 – April 4, 1976) was a Swedish born American **electronic engineer** who made important contributions to **communication theory**.^[1]

Contents

[hide]

1

Personal life

2

Education

3

Career

4

Technical contributions

5

See also

6

References

7

External links

Personal life

Nyquist was born in the **Stora Kil** parish of **Nilsby**, **Värmland**, **Sweden**. He was the son of Lars Jonsson Nyqvist (b. 1847) and Katrina Eriksdotter (b. 1857). His parents had seven children: Elin Teresia, Astrid, Selma, Harry Theodor, Aemellie, Olga Maria, and Axel.^[2] He emigrated to the **USA** in 1907.

Education


He entered the **University of North Dakota** in 1912 and received B.S. and M.S. degrees in electrical engineering in 1914 and 1915, respectively. He received a **Ph.D.** in physics at **Yale University** in 1917.

Career

He worked at **AT&T's** Department of Development and Research from 1917 to 1934, and continued when it became **Bell Telephone Laboratories** that year, until his retirement in 1954.

Nyquist received the **IRE Medal of Honor** in 1960 for "fundamental contributions to a quantitative understanding of

Harry Nyquist



Harry Nyquist (1889–1976)

| | |
|-------------------------|---|
| Born | February 7, 1889 <div>Stora Kil, Nilsby, Värmland, Sweden</div> |
| Died | April 4, 1976 (aged 87) <div>Harlingen, Texas, U.S.</div> |
| Residence | United States |
| Nationality | American |
| Fields | Electronic engineer |
| Institutions | Bell Laboratories |
| Alma mater | Yale University <div>University of North Dakota</div> |
| Doctoral advisor | Henry Andrews Bumstead |
| Known for | Nyquist-Shannon sampling |

www.liu.se